

THE ALPHA



..kÜat..

(Kōō-āt)

WARNINGS

This rack is designed to carry 3 bikes with a total weight not to exceed 100 pounds

Follow instructions for proper mounting procedure

3. Make sure your vehicle hitch is in good working condition
4. Do not take carrier through automatic car wash
5. Replace straps at the first sign of wear by calling Kuat toll free (877)822-5828
6. This rack is not intended to be disassembled, contact Kuat for technical assistance
7. Do not use hitch extenders with this product
8. This rack is not designed for off road use

Warranty

Kuat Innovations offers a lifetime guaranty that certifies our racks to be free of defects in material and/or craftsmanship. The following conditions apply:

- 1) Warranty applies to original owner.
(Please keep sales receipt for your records)
- 2) Warranty does not cover excessive wear and tear, accidental damage or abuse.
- 3) Repair and replacement of any part is at Kuat Innovations' discretion.
- 4) All repairs made to the main structure must be done by a Kuat technician
- 5) All claims must be shipped prepaid.



If you have any problems with your rack please contact Kuat directly by calling toll free (877)-822-KUAT, or by e-mail:

info@kuatinnovations.com



Lower Area

1. Remove lower pin from store position
2. Rotate lower hitch 270 degrees
3. Place rack into vehicle receiver
4. Install hitch lock
5. Place lower pin through bracket and post
6. Turn large knob to the right to tighten into hitch
7. Turn small knob on bracket to the right to remove excess movement

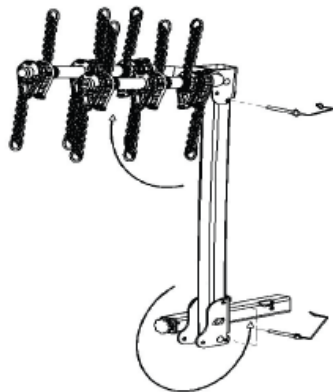

Upper Area


1. Remove pin from upper store position
2. Lift arms to carrier position
3. Place upper pin through bracket and post
4. Turn small knob on bracket to the right to remove excess movement

..küät..

(Koo-ät)

Recommended procedure for mounting your bike

1. We recommend using four straps per bike
2. Place anti-sway carriage on down tube (use 1 strap)
3. Mount the 3 remaining straps on top tube

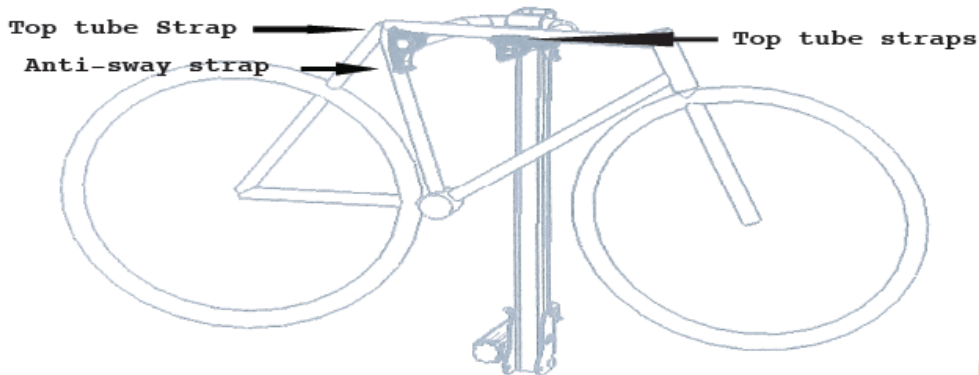

4. When mounting multiple bikes, alternate the direction of your handle bars for a better fit

Bike lock

1. Place bike on the end carriages
2. Pull cable from magnetic catch
3. Wrap cable around the top tube on bike
4. Insert cable tip into side slot
5. Press lock cylinder button
6. Don't lose your keys!!!



..KÜÖÄT..
(KÖÖ-ät)

Destination hardware built to last a lifetime -
The destinations are up to you

www.kuatracks.com

